





Acuity Series AC3050 10 mBar Very Low Pressure Sensor Die

Acuity Incorporated
Fremont, California
USA 94539

The AC3050 series of very low pressure die is an extension of the AC3030 low pressure series to reach even lower full scale ranges. Despite a die size that is much smaller than traditional low-pressure die, it provides improved zero-stability, reduced g-sensitivity and reduced sensitivity to humidity. This added stability permits use with added amplification to achieve accurate performance in ranges much lower than its nominal 10 mBar rating.


The AC3050 is based on the same structure and sensing element of the AC3030 but optimized for 10 mBar full-scale and below. While it is a slightly larger layout (1.9 mm square), it remains much smaller than traditional low-pressure die. It can be further amplified for lower pressure sensitivity. In addition to these standard pressure ranges, the die is available for higher full-scale ranges on a special order basis.

Suitable for a wide range of packages, it is particularly designed for low-pressure differential sensing in such applications as HVAC, air-flow and a variety of industrial pressure and flow applications.

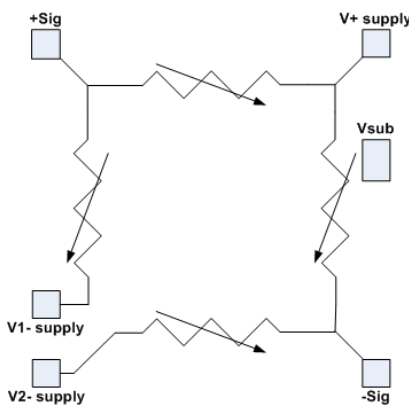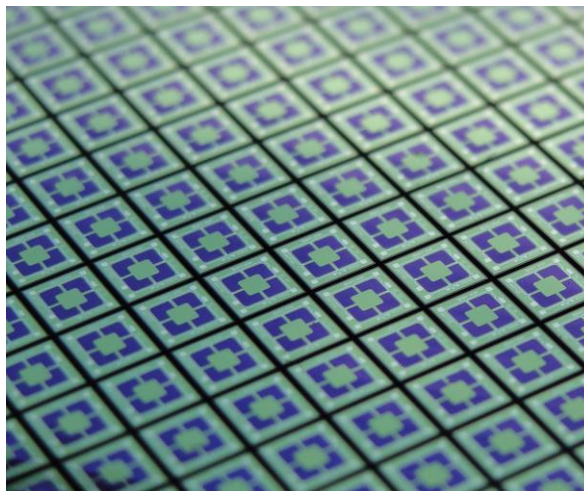

Equivalent Circuit Diagram

For maximum performance, Vsub should be tied to the highest voltage in the circuit.

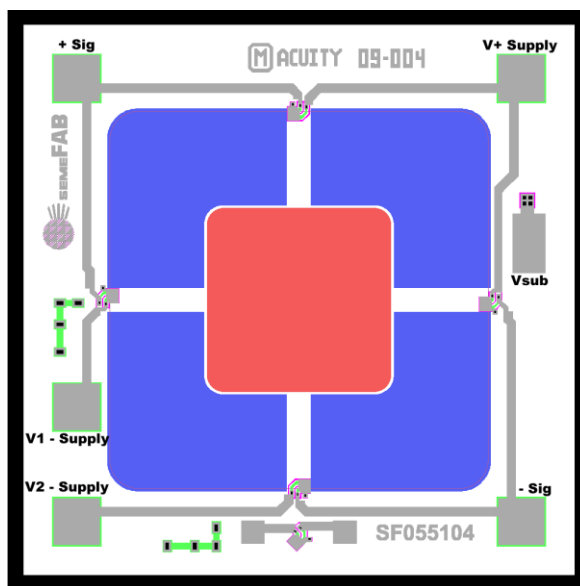

Pin-out of Acuity AC3050 Low-Pressure Die

+ Sig increases and -Sig decreases when pressure is applied to the top of the die



Acuity Incorporated
 Fremont, California
 USA 94539

Specification	Acuity Low Pressure Sensor - AC3050					Note
		Min	Nominal	Max	Unit	
Mechanical						
Stepping size	X	1.899	1.900	1.901	mm	
	Y	1.899	1.900	1.901	mm	
Unconstrained wafer thickness	Z	0.401	0.406	0.411	mm	
Electrical						
Resistance						
Bridge resistance		3.25	3.70	4.25	kohms	1
TCR		2300	2800	3100	ppm/degree C	2
Resistance Ratiometricity		-1.0	0.1	1.0	%	3
Offset						
Offset - No Pressure		-100.0	0.0	25.0	mV	1
Offset Ratiometricity		-0.2	0	0.2	mV/V	3
TCO		-25	2	25	microV/V/degree C	2
Leakage						
Current Leakage - individual		0.1	2.1	20	nA	4
Sensitivity						
Sensitivity		30	55	82	mV	5
TCS		-2100	-1800	-1400	ppm/degree C	2
Pressure Nonlinearity		-0.75	0.15	0.75	%	6
Pressure Nonlinearity - F/B		-1.25	0.15	1.25	%	7
Mechanical Pressure						
Full Scale Pressure Ranges		10			mBar	8
Overpressure - Burst		>30X			FS Pressure	
Overpressure - Proof		>10X			FS Pressure	

Note

- 1 Measured at 5.0 volts
- 2 Measured at +25 and +75 °C, normalized by reading at 25 °C
- 3 Measured at -2.5 and 5.0 Volts, normalized by reading at 5.0 volts
- 4 Measured from VSub substrate contact to any Resistor Pad at 10 V
- 5 Full scale output at 5 Volt drive and rated pressure
- 6 1/2 TBNL (Terminal Base Nonlinearity at 0, 50%, and 100% FS) with topside pressure
- 7 Ratio of sensitivity with +FS and - FS pressures applied
- 8 For custom pressure ranges, consult Acuity.

Ordering Information:

AC3050-XXX

where XXX=010 for 10 mBar.

Acuity reserves the right to make changes to its products and specifications at any time, without notice. All sales are made pursuant to Acuity's standard terms and conditions of sale. While the information in this publication has been checked, Acuity makes no representations or warranties other than as specifically set forth in the terms and conditions of sale. Acuity assumes no responsibility for the use of any information or products described herein, conveys no license under any patent or other right, and makes no representation that the information or products are free of patent infringement. Acuity does not recommend the use of any of its products in life support or other critical applications. Products are not authorized for use in such applications and customer assumes the full risk of any such use. Acuity and the Acuity logo are trademarks of Acuity, Inc. © Copyright 2009-2017 Acuity, Incorporated.